


BP-172M

Mobile Thermal Printer



Applications

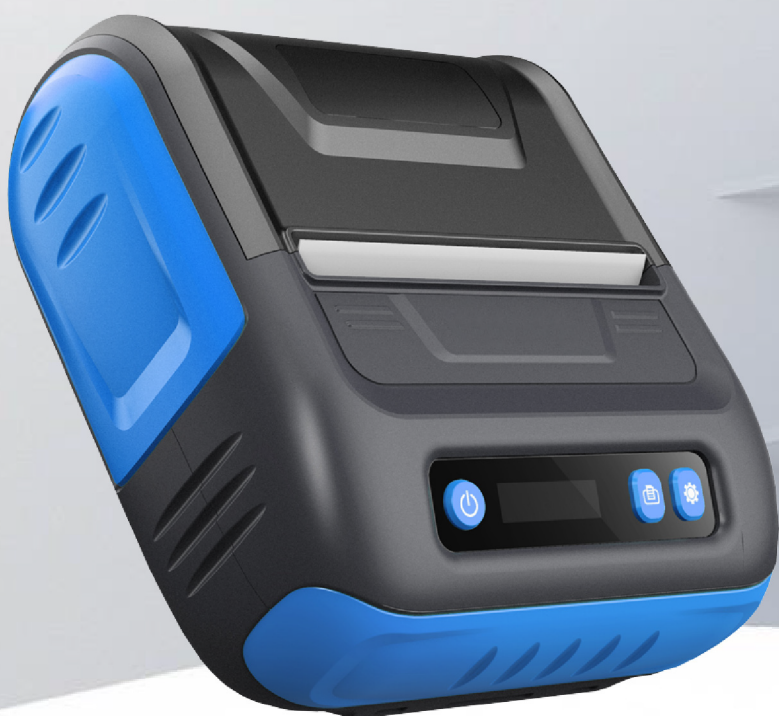

Shopping



Mart



Warehouse



Hospital



Logistics



Ticketing

www.bopuson.com

BP-172M

Mobile Thermal Printer



Specifications		
Printer Characteristics	Printer Name	BP-172M
	Printing Method	Direct Thermal
	Resolution	203dpi
	Print Density	576 dots/line
	Printing Speed	90mm/s(+/-5mm)
	Maximum Printing Width	72mm
	Voice/Command Set	ESC/TSPL
Memory	RAM	512kb
	ROM	8M
	Processor Frequency	120M
Media Characteristics	Loading Method	Easy Paper Loading Structure
	Paper Type	Thermal Receipt Paper/Adhesive Label
	Maximum Paper Width	80mm
	Media Thickness	0.05-0.15mm
	Sensor Type	Photoelectric Sensor
Operating Parameters	Operating Temperature/Humidity	Temperature: 0°C-45°C Humidity: 20%-90%
	Storage Temperature/Humidity	Temperature: -10°C-60°C Humidity: 10%-90% (Excluding Paper Rolls)
Electrical Specifications	Battery	9V/2200mAh Rechargeable Polymer Lithium Battery
	Charging Time	3 h
	Fully-Charged Working Time	150m
	Standby Time	3days
	Agency Certification Standards	CCC/CE/FCC/ROHS/BIS
Physical Parameters	Dimension(L*W*H)	132*115*61mm
	Weight	0.5kg
Communication Interfaces and Functions	System Support Platform	Android & iOS & Windows
	Standard Configuration	USB+Bluetooth
	Interface language	Chinese/English/Portuguese
Fonts/Graphics/Symbols	Character Size	12*24, 24*24
	Font Library Content	GBK-Chinese and English/CP437 - American/Canada English/CP737 - Greek/CP775 - Baltic/CP850 - including Western European languages (German, Spanish, Italian)/CP852 - Including Central and Eastern European languages (Albanian, Croatian, Czech, English, Finnish, Hungarian, Irish, German, Polish, Romanian, Serbian, Slovak, Slovenian)/CP855 - Cyrillic/CP857 - Turkish/CP858 - "Multilingual/CP860 - Portuguese/CP862 - Hebrew/CP863 - Canadian/CP865 - Germanic languages/CP866 - Cyrillic/Russian/CP1251 - Old Cyrillic/CP1253 - Greek/CP1254 - Turkish/CP1255 - Hebrew
Barcode Types	1D	Code 39、Code 128
	2D	QR CODE