


BP-272K

Thermal Printer



Applications

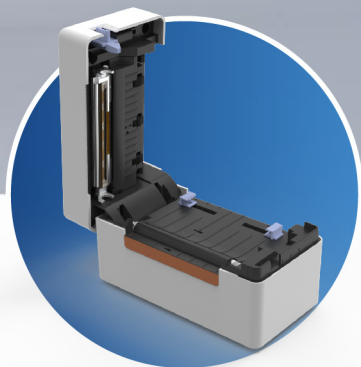

Shopping



Mart



Warehouse



Hospital



Logistics



Ticketing

www.bopuson.com

BP-272K Thermal Printer



Printer Characteristics	Printing Method	Direct thermal
	Resolution	203DPI
	Printing Speed	180mm/s
	Maximum Printing Width	72mm
	Printing Density	/
	Label Height	30-250mm
	Voice/Command Set	TSPL
	Paper Retraction	Supported
Memory	RAM	2M
	Flash Memory	2M
Print Head	Print Head Material	SHEC
	Advantages	High Performance, Fast Speed
	Print Head Life	50KM (Label Paper) 100KM (Continuous Paper)
Paper Cutting/Voice	Paper Cutting Method	Manual Tearing
	Cutter Life	/
	Voice	Not Supported
Media Characteristics	Paper Warehouse/Loading Method	/
	Paper Type	Label Paper, Continuous Paper, Black Mark Paper, Folded Paper
	Width	40-80mm (Including Backing Paper)
	Outer Diameter of Paper Roll	/
	Inner Diameter of Paper Roll	/
	Media Thickness	0.06-0.18mm
	Sensor Type	Sew Mark Detection, Black Mark Detection, Cover Open Detection, Paper Shortage Detection, Paper Retraction Detection
	Operating Temperature/Humidity	Temperature: 0-45°C Humidity: 20-90%
Operating Parameters	Storage Temperature/Humidity	Temperature: -10-60°C Humidity: 10-90% (Excluding Paper Rolls)
	Electrical Parameters	DC 24V 1.5A
	Battery	/
	Battery Life	/
	Agency Certification Standards	3C Certification
	Dimension(L*W*H)	160*84*85mm
Physical Parameters	Weight	Bare Machine 0.55kg; Complete Machine 1kg
	Standard Configuration	USB
Fonts/Graphics/Symbols	Characters	Standard GB18030 Simplified Chinese
	Character Size	ASCII Font A: 12×24 ASCII Font B: 9×17 Chinese Characters: 24×24
	Number of Columns	Font A 48 Columns / Font B 64 Columns / Simplified, Traditional - 24 Columns
	Line Spacing	3.75mm (Adjustable Line Spacing via Command)
	Extended Code Page	CP437, CP850, CP852, CP860, CP863, CP865, CP866, WPC1250, WPC1251, WPC1252, WPC1253, WPC1254
	Bitmap Fonts	Song Typeface
	Vector Fonts	/
	Graphic Functions	Supported
	User-Defined Characters	Not Supported
	Direct Bitmap Printing	Supported
Barcode Types	1D	Code 39, 39C, 125, Code 93, ITF25, EAN128, Code 128, Codabar, EAN-8, EAN8+2, EAN8+5, EAN-13, EAN13+2, EAN13+5, UPC-A, UPCA+2, UPCA+5, UPC-E, UPCE+2, UPCE+5 MSIC, ITF14, EAN14, CODE11, POST
	2D	QRCODE, PDF417(Optional)
Others	Processor	GD32F303VCT6_MCU
	System Support Platform	XP/Win7/Win8/Win10/ios/Android/Linux/MacOS
Product Highlights	Target market	E-commerce, express delivery, logistics, warehousing, retail, supermarket, store front desk and other industry markets
	Main Features	Exquisite and Compact, High-Speed Printing, High Cost Performance, Good Heat Dissipation, Automatic Paper Recognition, Intelligent Paper Retraction, Paper Shortage Reprint, Bad Point Detection