


BP-2104K

Thermal Printer

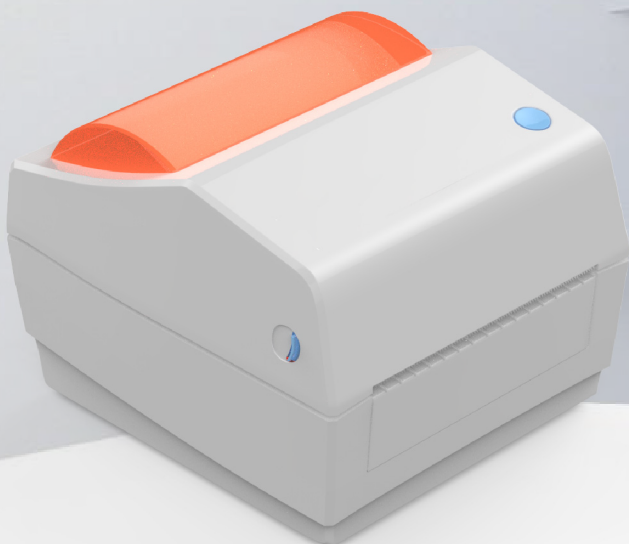

Key features

- High-Speed Printing, Intelligent Paper Retraction, Automatic Paper Recognition.
- Durable and Reliable, Rapid Heat Dissipation.
- Large Paper Bin and Multi-label Format Compatible.

Applications



Shopping



Mart



Warehouse



Hospital



Logistics



Ticketing

www.bopuson.com

BP-2104K Thermal Printer



Printer Characteristics	Printing Method	Direct Thermal
	Resolution	203dpi
	Maximum Printing Speed	150mm/s
	Maximum Printing Width	104mm
	Label Height	30mm-250mm
	Voice/Command Set	TSPL
	Paper Retraction	Supported
Memory	RAM	2MB
	Flash Memory	2MB
Print Head	Print Head Brand	SHEC
	Advantages	High Performance, Fast Speed
	Print Head Life	50km
Paper Cutting/Voice	Paper Cutting Method	Manual Tearing
	Voice	Not Supported
Media Characteristics	Paper Warehouse/Loading Method	Supported
	Paper Type	Label Paper, Continuous Paper, Black Mark Paper, Folded Paper
	Width	26.7mm-120mm
	Outer Diameter of Paper Roll	130mm
	Inner Diameter of Paper Roll	25.4mm- 38mm
	Media Thickness	0.06mm-0.18mm
	Sensor Type	Sew Mark Detection, Black Mark Detection, Cover Open Detection, Paper Shortage Detection, Temperature Detection, Paper Retraction Detection
Operating Parameters	Operating Temperature/Humidity	Temperature: 0°C-45°C Humidity: 20%-90%
	Storage Temperature/Humidity	Temperature: -10°C-60°C Humidity: 109%-90% (Excluding Paper Rolls)
	Electrical Parameters	DC24V 2.5A
	Agency Certification Standards	3C Certification
Physical Parameters	Dimension(L*W*H)	217mm*182mm*171mm
	Weight	1.35kg
Communication Interfaces and Functions	Standard Configuration	USB
Fonts/Graphics/Symbols	Characters	Standard GB18030 Simplified Chinese
	Character Size	ASCII Font A: 12×24 ASCII Font B: 9×17
	Number of Columns	Font A-72 Columns/Font B-96Columns/Simplified, Traditional-36Columns
	Line Spacing	3.75mm (Adjustable Line Spacing via Command)
	Extended Code Page	CP437,CP850,CP852,CP860,CP863,CP865,CP866, WPC1250, WPC1251, WPC1252, WPC1253, WPC1254
	Bitmap Fonts	Song Typeface
	Graphic Functions	Supported
	User-Defined Characters	Not Supported
	Direct Bitmap Printing	Supported
Barcode Types	1D	Code 39, 39C, 125, Code 93, ITF25, EAN128, Code 128, Codabar, EAN-8, EAN8+2, EAN8+5, EAN-13, EAN13+2, EAN13+5, UPC-A, UPCA+2, UPCA+5, UPC-E, UPCE+2, UPCE+5 MSIC, ITF14, EAN14, CODE11, POST
	2D	QRCODE, PDF417(Optional)
Others	Processor	GD32F303VCT6_MCU
	System Support Platform	XP/Win7/Win8/Win10/Ios/Android/Linux/MacOS